



VIEWBOARDS

ViewBoard IFP6533-G


Toets Features

- Multi-tasking capabilities for enhanced lesson delivery.
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation.
- Powered by Android 13



Product Omschrijving

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

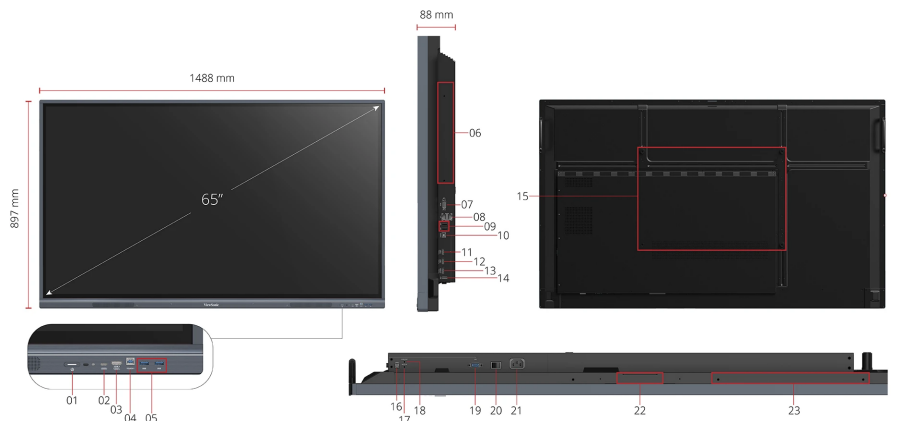

1. POWER ON/OFF
2. USB C
3. HDMI 1
4. TOUCH 1

8. LAN
9. USB 2.0x2
10. TOUCH 2
11. HDMI 2

15. VESA® Wall Mount (600x400mm)
16. SPDIF
17. AUDIO in
18. AUDIO out

22. Wi-Fi Slot
23. Sensor Mount

5. USB 3.0x2
6. OPS Slot
7. RS-232

12. HDMI 3
13. HDMI OUT
14. USB

19. VGA
20. Power On/OFF
21. AC IN

Bezoek Gebruikers

www.viewsonic.com



DISPLAY

Paneelgrootte:	65"
Paneeltype:	TFT LCD Module with DLED Backlight. IPS
Weergavegebied (mm):	1428.48(H) × 803.52(V) (64.5" diagonal)
Aspectratio:	16:9
Resolutie:	UHD 3840x2160(Pixels)
Colors:	1.07B colors
Helderheid:	450 nits
Contrastverhouding:	5000:1 (max. with DCR enabled)
Reactietijd:	8ms
Kijkhoeken:	H=178, V=178
Levensduur achtergrondverlichting:	50,000 Hours (8 hours of use per day)
Oppervlakte behandeling:	Hardness: 7H Anti-glare coating
Oriëntatie:	Landscape

PLATFORM

Processor:	Quad-core ARM Cortex (A55*4)
RAM:	8GB DDR4
Opslag:	128 GB

TOUCH

Type:	Ultra Fine Touch Technology
Touch punt:	40 points touch

INPUT

HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)
RGB/VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1 (Optional Intel Standard OPS)
WiFi:	x1 (Optional VB-WIFI-002/VB-WIFI-004/VSB-050)

OUTPUT

HDMI:	HDMI 2.0 x1
Audio:	x1
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0:Front x2, Rear x2; USB2.0 x1
Type B:	x2 (Rear x1 + Front x1)
Type C:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)

SPEAKERS

18W x 2

TOP CAMERA PLATE**BUNDELSOFTWARE**

Basis annotatiesoftware:	myViewBoard Whiteboard
Pro annotatiesoftware:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Wireless Presentation:	myViewBoard Display

Draadloze presentatie met Touch Feedback: Viewboard Cast: Yes

SPECIALE EIGENSCHAPPEN

All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.
----------------------	--

Eenvoudig delen via LAN tussen IFP en slot-in-apparaat: 10/100M for Android & Slot-in PC

Light Sensor: Yes

STROOM

Spanning:	100-240V AC
Consumptie:	On: 99W ; Off: ≤ 0.5W

ERGONOMICS

Wandmontage (VESA®): 600*400

OPERATING CONDITIONS

Temperatuur (° C):	0°C to 40°C
Luchtvochtigheid:	20% ~ 80% RH non-condensing

AFMETINGEN (B X H X D)

Fysiek (inch/mm):	1488 x 897 x 88 mm / 58.6 x 35.3 x 3.5 in
Verpakking (inch / mm):	1628x1005x208 mm / 64.1x 39.6x 8.2in

WEIGHT

Netto (lb / kg):	77.1lb/34.95kg
Bruto (lb/kg):	98.5 lb/44.7kg

REGULATIONS

FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS

VERPAKKINGSINHOUD

1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m

COMPATIBLE SLOT-IN PC

VPC35-W53-G1/VPC37-W53-G1



Yes

INGESLOTEN BESTURINGSSYSTEEM

Android 13

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

